

Antibiotic stainless steel flanged globe




PRODUCT OVERVIEW

Body material:	CF8
Size range:	DN15 ~ 350
Pressure rating:	1.6MPa
Operating temperature:	-29 ~ 150°C
End connection:	Flanged
Applicable medium:	Water, Steam, Oil, Nitric acid liquid
Mode of operation:	Manual
Applicable industry:	Chemical & Petrochemical, Oil & Gas, Mining & Minerals, Power generation, Water & Water Treatment, Pulp & Paper, Municipal, Heating & Ventilation
Design & Manufacture:	API, ASME, ASTM, ANSI, BS, DIN, JIS, ISO, GB

DESIGN FEATURES

1. This is a flange valve, which implements the standard HG/T 4086.
2. This valve is composed of a valve body, a bonnet, a valve clack, a valve stem, valve stem nuts and a hand wheel. The valve stem rotates by turning the hand wheel to drive the valve clack to rise or fall for opening and closing.



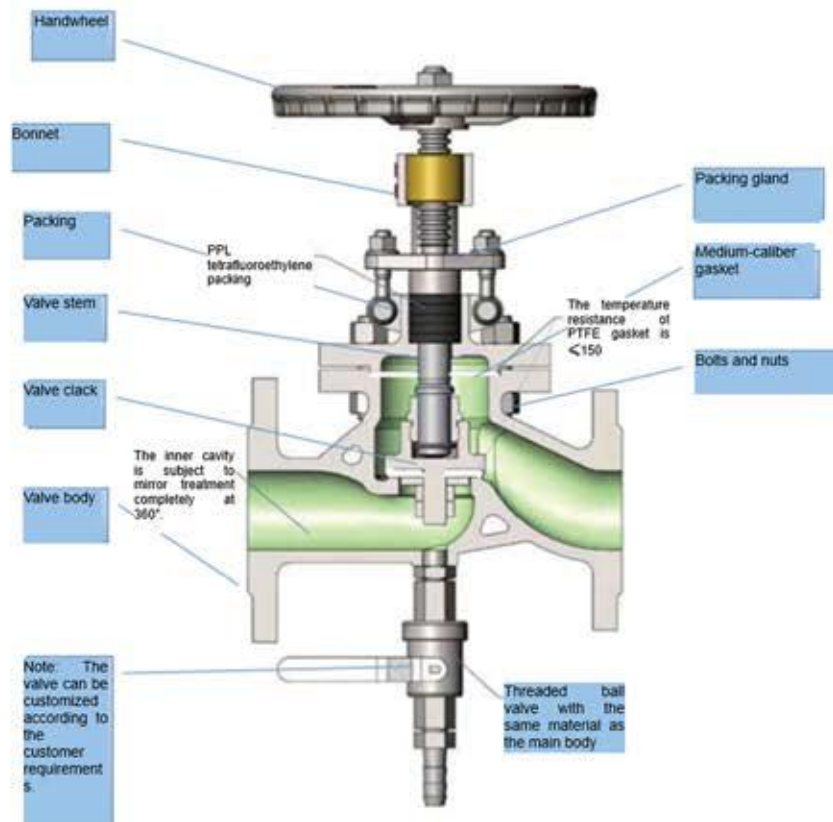


(Structure)

VALVE MATERIAL LIST

Part name	Material
Valve body, Bonnet	CF8
Valve clack	F304/CF8+PTFE
Valve stem	F304
Medium-caliber gasket	PTFE
Packing	PTFE
Stem nut	ZCuAl10Fe3
Handwheel	QT450-10

TECHNICAL SPECIFICATIONS

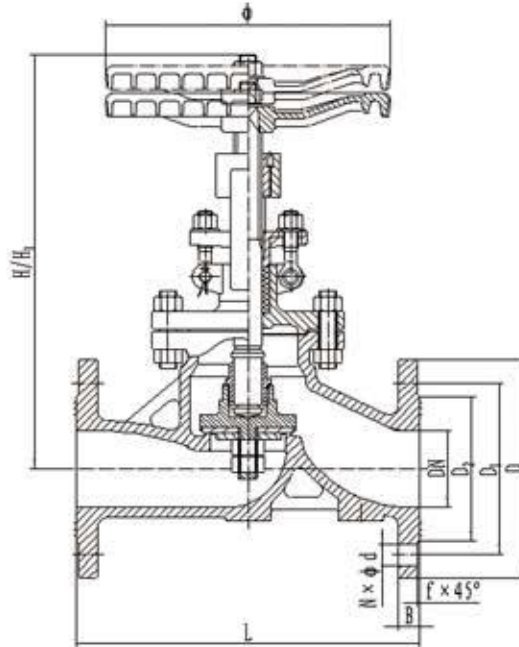

Model	DN (mm)	Size(mm)								
		L	D	D ₁	D ₂	b-f	z-φ d	H ₁	H ₂	D ₀
KJ41F-16P	15	130	95	65	46	16-2	4-φ 14	199	212	120
	20	150	105	75	58	18-2	4-φ 14	211	230	120
	25	160	115	85	68	18-2	4-φ 14	219	229	140
	32	180	140	100	78	18-2	4-φ 18	241	252	160
	40	200	150	110	88	18-2	4-φ 18	262	275	200
	50	230	165	125	102	18-2	4-φ 18	277	296	200
	65	290	185	145	122	18-2	8-φ 18	326	349	240
	80	310	200	160	138	20-2	8-φ 18	350	380	280
	100	350	220	180	158	20-3	8-φ 18	414	449	320
	125	400	250	210	188	22-2	8-φ 18	471	532	360
	150	480	285	240	212	22-2	8-φ 22	511	575	400
	200	600	340	295	268	24-2	12-φ 22	594	675	450
	250	650	405	355	320	26-3	12-φ 26	756	844	560
	300	750	460	410	375	28-4	12-φ 26	850	950	640
350	850	520	470	438	30-4	16-φ 26	1001	1123	720	